


## Product Range: Nelissen

Product Name: Mechelen | Size: 215 × 100 × 65mm | Manufactured: Belgium



Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<15
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.


If specific test results are required, sample should be taken from current production lots.

AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.

October 2020

## Product Range: Nelissen

Product Name: Gent | Size: 215 × 100 × 65mm | Manufactured: Belgium




Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<15
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

**Product Name:** Hasselt | **Size:** 215 × 100 × 65mm | **Manufactured:** Belgium




Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

Product Name: Limberg | Size: 215 × 100 × 65mm | Manufactured: Belgium




Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

**Product Name:** Charleroi | **Size:** 215 × 100 × 65mm | **Manufactured:** Belgium




Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

**Product Name:** Bruges | **Size:** 215 × 100 × 65mm | **Manufactured:** Belgium





Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

Product Name: Ostend | Size: 215 × 100 × 65mm | Manufactured: Belgium

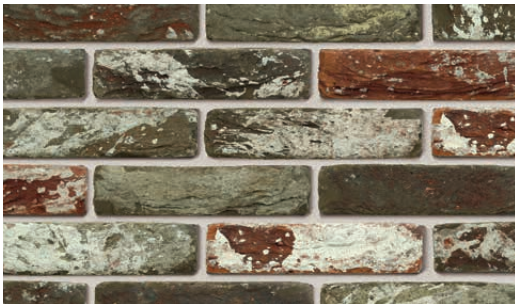


Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020

## Product Range: Nelissen

**Product Name:** Tornai | **Size:** 215 × 100 × 65mm | **Manufactured:** Belgium




Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<18
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020



## Product Range: Nelissen

Product Name: Ypres | Size: 215 × 100 × 65mm | Manufactured: Belgium



Typical Properties	
Length (mm)	215mm
Width (mm)	100mm
Height (mm)	65mm
Dimensional Category	DW1
Average Weight / Unit (kg)	2.5
Units per Square Metre	59
Pack Size	730
Characteristic Unconfined Compressive Strength (f'uc) MPa	>5
Maximum Cold Water Absorption (%)	<15
Initial Rate of Absorption (IRA) (kg/m <sup>2</sup> min)	1.0 - 8.0
Estimated 15 year Coefficient of Expansion (e'Factor)	<1.0
Core Volume (%)	Solid
Liability to Efflorescence	Nil to Slight
Lime Pitting Liability	Nil to Slight
Solar Absorptance Rating	-
High Pressure Cleaning Test	NA
Durability Class	General Purpose

This Data represents average results from commercial production lots.  
 If specific test results are required, sample should be taken from current production lots.  
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.  
 October 2020