



Product Range: Stratos

Product Name: Alto Silver | **Size:** 230 × 110 x76mm | **Manufactured:** VIC

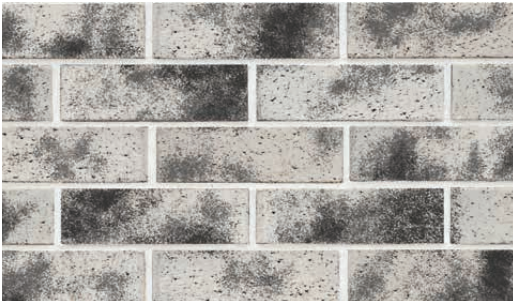


Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	3.2
Units per Square Metre	48.5
Pack Size	400
Characteristic Unconfined Compressive Strength (f'uc) MPa	>20
Maximum Cold Water Absorption (%)	<8
Initial Rate of Absorption (IRA) (kg/m ² min)	0.3 - 1.5
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<33
Liability to Efflorescence	Slight
Lime Pitting Liability	Slight
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020

Product Range: Stratos

Product Name: Rain Burst | **Size:** 230 × 110 x76mm | **Manufactured:** VIC



Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	3.2
Units per Square Metre	48.5
Pack Size	400
Characteristic Unconfined Compressive Strength (f'uc) MPa	>20
Maximum Cold Water Absorption (%)	<8
Initial Rate of Absorption (IRA) (kg/m ² min)	0.3 - 1.5
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<33
Liability to Efflorescence	Slight
Lime Pitting Liability	Slight
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.


If specific test results are required, sample should be taken from current production lots.

AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.

October 2020

Product Range: Stratos

Product Name: Thunder Grey | **Size:** 230 × 110 x76mm | **Manufactured:** VIC



Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	3.2
Units per Square Metre	48.5
Pack Size	400
Characteristic Unconfined Compressive Strength (f'uc) MPa	>20
Maximum Cold Water Absorption (%)	<8
Initial Rate of Absorption (IRA) (kg/m ² min)	0.3 - 1.5
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<33
Liability to Efflorescence	Slight
Lime Pitting Liability	Slight
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.


If specific test results are required, sample should be taken from current production lots.

AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.

October 2020

Product Range: Stratos

Product Name: Nimbus Black | Size: 230 × 110 x76mm | Manufactured: VIC



Typical Properties	
Length (mm)	230mm
Width (mm)	110mm
Height (mm)	76mm
Dimensional Category	DW2
Average Weight / Unit (kg)	3.2
Units per Square Metre	48.5
Pack Size	400
Characteristic Unconfined Compressive Strength (f'uc) MPa	>20
Maximum Cold Water Absorption (%)	<8
Initial Rate of Absorption (IRA) (kg/m ² min)	0.3 - 1.5
Coefficient of Expansion e'Factor (mm/m)	<1.0
Core Volume (%)	<33
Liability to Efflorescence	Slight
Lime Pitting Liability	Slight
Solar Absorptance Rating	-
Durability Class	Exposure Grade

This Data represents average results from commercial production lots.
 If specific test results are required, sample should be taken from current production lots.
 AUSTRALIAN STANDARD TEST METHODS AS/NSZ 4456 ARE USED AS APPLICABLE.
 October 2020