










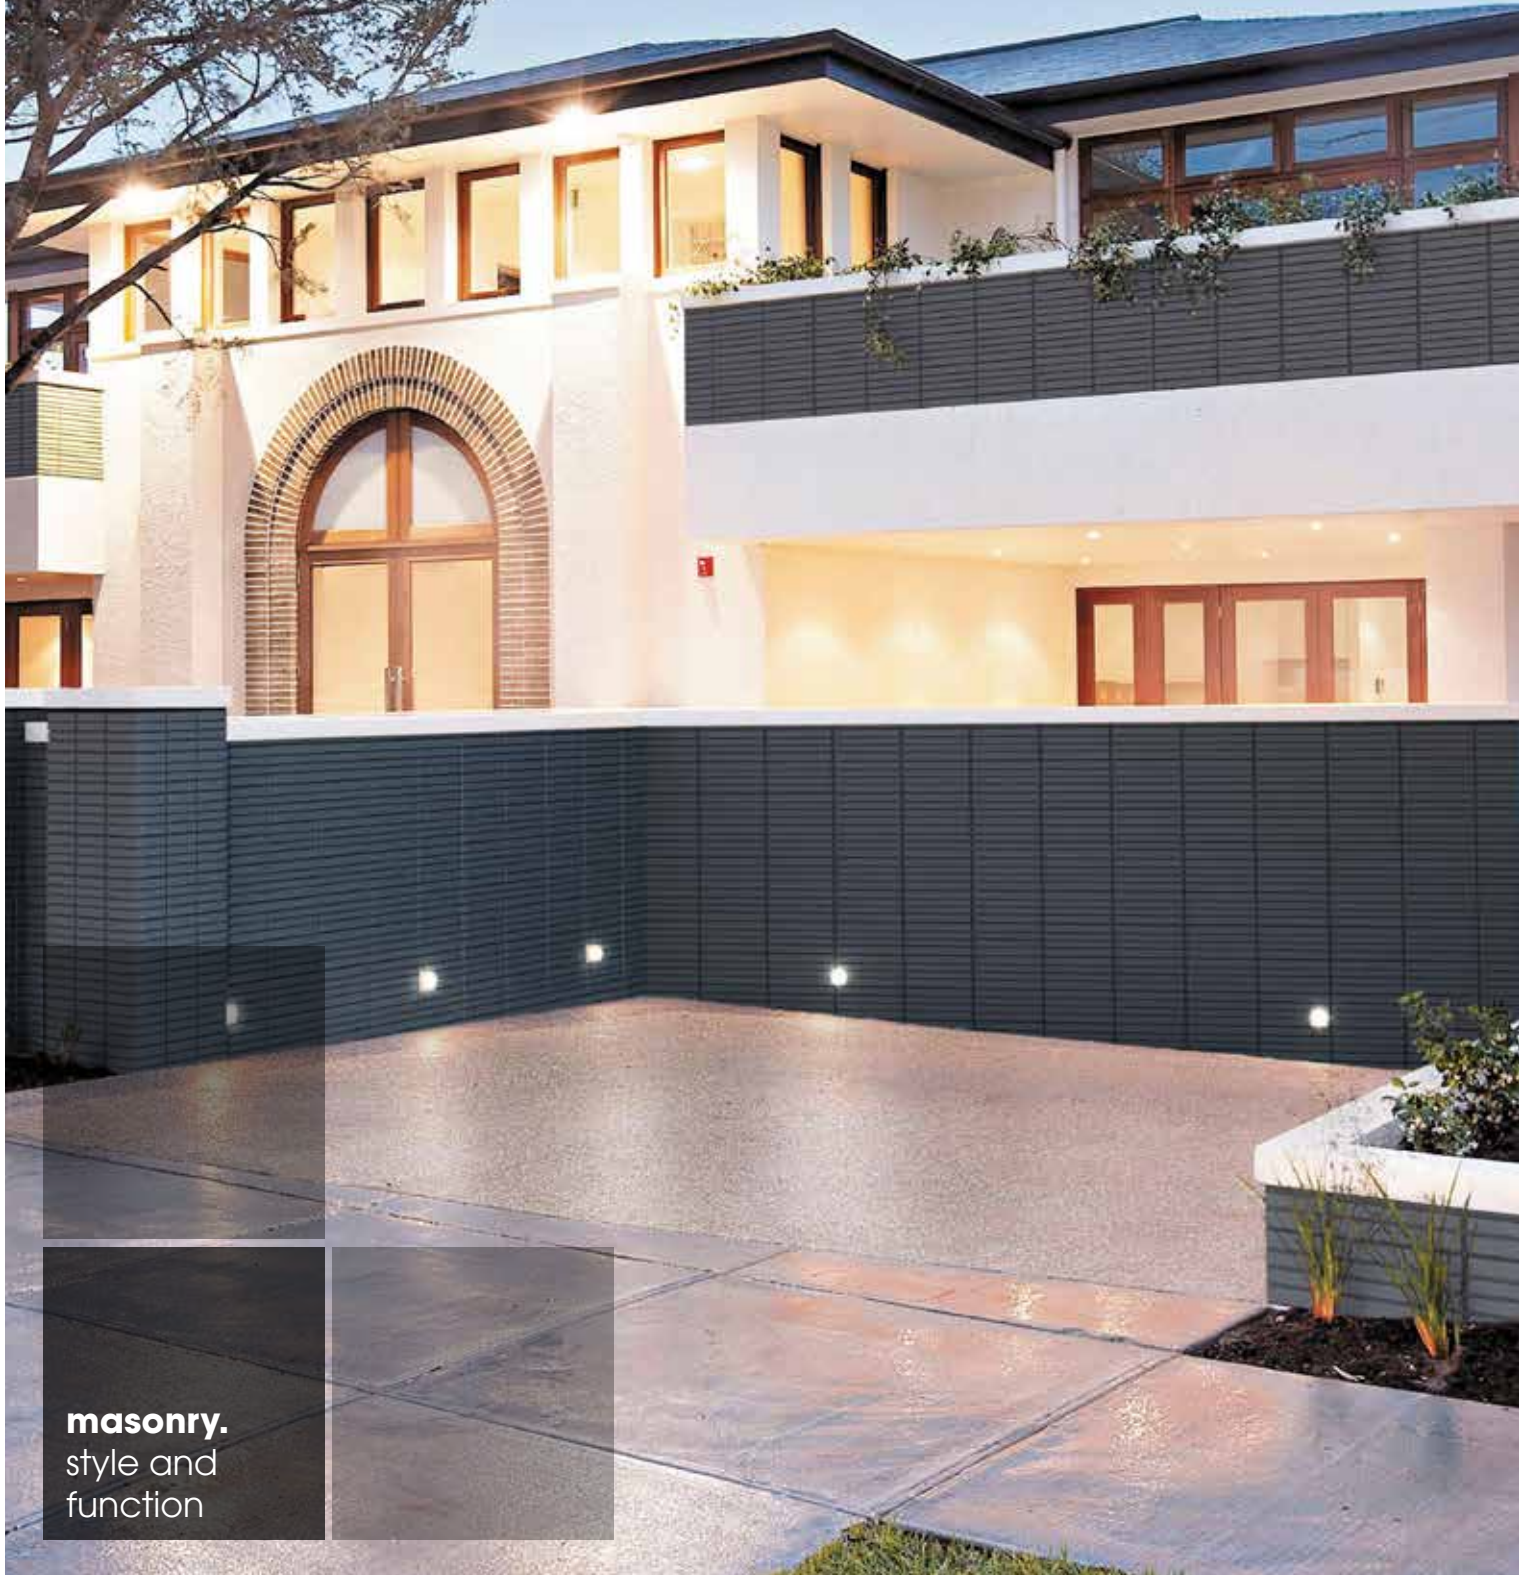















































Masonry Block Guide

Victoria



masonry.
style and
function

GB Smooth	GB Split Face	GB Honed	GB Aspect Split Face	GB Aspect Honed	GB Veneer Split Face	GB Veneer Honed
						
Porcelain	Porcelain	Porcelain	Porcelain	Porcelain	Porcelain	Porcelain
						
Limestone	Limestone	Limestone	Limestone	Limestone	Limestone	Limestone
						
Pebble	Pebble	Pebble	Pebble	Pebble	Pebble	Pebble
						
Sand	Sand	Sand	Sand	Sand	Sand	Sand
						
Shale	Shale	Shale	Shale	Shale	Shale	Shale
						
Nickel	Nickel	Nickel	Nickel	Nickel	Nickel	Nickel
						
Pewter	Pewter	Pewter	Pewter	Pewter	Pewter	Pewter
						
Russet	Russet	Russet	Russet	Russet	Russet	Russet



Austral Masonry offers a complete system consisting of two separate parts with an optional third:

- 1. Austral Masonry Concrete Blocks** of water resisting blocks (dramatically reduces secondary efflorescence)
- 2. Aus-Lock** mortar additive. This works as a plasticiser, bonding agent and cement retarder slowing the setting time of the mortar giving more time to clean up. In addition, the additive will impart some waterproofing property to the mortar giving an added resistance to lime leaching.
- 3. Aus-Seal** and **Aus-Shield** are an applied finish to further enhance the product and give some self cleaning properties. Call your representative to discuss your requirements and learn more.

Brickworks Design Centres Sales & Selection

VIC

Lynbrook

Cnr Northey Road
& Westport Highway
Lynbrook

Deer Park

972 Western Highway
Deer Park
(Near cnr of Robinson Rd)

Geelong

Surf Coast Highway
Grovedale
(cnr Essington St)

Richmond

490 Swan Street
Richmond

Wollert

Brickmakers Drive
Wollert VIC 3750

Trading hours

For trading hours please visit www.australmasonry.com.au

Austral Masonry Head Office National

Brickmakers Drive
Wollert VIC 3750

Tel. 03 9303 4000
Fax. 03 9308 1974

Email. sales@australmasonry.com.au

- 1. Stock colours.** Colours other than stock colours are made to order. Contact your nearest Austral Masonry office for your area's stock colours. A surcharge applies to orders less than the set minimum quantity.
- 2. Colour and texture variation.** The supply of raw materials can vary over time. In addition, variation can occur between product types and production batches.
- 3.** We reserve the right to change the details in this publication without notice.
- 4.** For a full set of Terms & Conditions of Sale please contact your nearest Austral Masonry sales office.
- 5. Important Notice.** Please consult with your local council for design regulations prior to the construction of your wall. Councils in general require those walls over 0.5m in height and/or where there is loading such as a car or house near the wall be designed and certified by a suitably qualified engineer.
- 6. Max wall heights disclaimer**
The gravity wall heights are maximum heights calculated in accordance with CMAA MA-53 Appendix D guidelines and a qualified engineer should confirm the suitability of the product for each application. As such, due consideration must be given to but not limited to:
 - Cohesion
 - Dry backfill, no ingress of any water into the soil behind the retaining wall.
 - All retaining walls are designed for zero surcharge unless noted otherwise.

These walls are intended for structure Classification A walls only as defined in AS4678 Earth Retaining Structures as being where failure would result in minimal damage and/or loss of access.



1300 MASONRY (1300 627 667)

www.australmasonry.com.au



proud supporters



CHILDREN'S CANCER
INSTITUTE AUSTRALIA

The range of building products from
BRICKWORKS
BUILDING PRODUCTS

australbricks
since 1900

auswesttimbers

australprecast

australfacades

australmasonry



nubrik
authentic brickwork

bristileroofting



BOWRAL BRICKS