




Product Details

range name	VERTICO SPLIT FACE
finish	SPLIT FACE
colours	PORCELAIN NICKEL PEWTER PEBBLE LIMESTONE
product code description	-

Properties and Specifications

nominal dimensions (length x width x height mm)	400 x 216 x 200mm
actual dimensions (length x width x height mm)	390 x 216 x 190mm
core volume (% overall thickness)	44
characteristic unconfined compressive strength (MPa)	>15
minimum shell thickness (mm)	-
average weight (KG)	17
average number per tonne	-
number per pallet	-
number per sqm/lm	12.5
durability class (to AS4456.10 - sodium sulphate and sodium chloride)	EXPOSURE GRADE
wall mass inc mortar hollow	-
CWA	-
IRA	0.4

Diagram

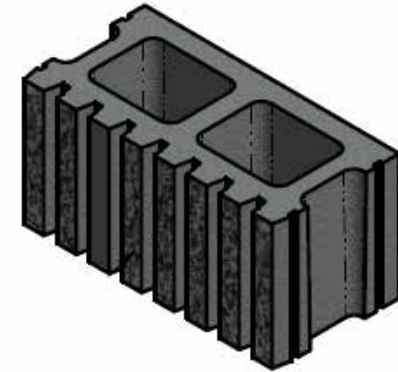

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact us for confirmation of product specification. Tested as per AS/NZS 4455.1: 2008 and 4456: 2003. Fire resistance levels as per AS3700: 2018. Acoustic opinion derived from Day Design Pty Ltd. 2012. Tested in accordance with AS 1191:1001 and AS/NZS 1276.1:1999.

^When reinforced and Srf <36: 240 minutes